


## DESCRIPTION

PD (Powered Device) Integrated Module (Isolation Type)

## FEATURES

- Fully supports IEEE802.3af/at (IT5300/5400)
- Fully supports IEEE802.3af/at/bt (IT5500)
- Small Single In-Line (SIL) package size –57.3mm (L) x 14mm (H)
- Input Voltage Range 44V to 57V
- Support PoE applications in both of Fast / Gigabit Ethernet environments.
- Short Circuit Protection
- Over-temperature Protection
- Programmable Classification (IT5300/5400 Default:Class 4 ;IT5500 Default:Class 8)
- High Efficiency
- Isolation level 1.5KVrms.
- Easy Installation and Low Cost (Isolation Type, Minimum External Devices required)
- Low Output Ripple and Noise
- Adjustable Output Voltage
- 1500Vrms Isolation (Input-Output)



## APPLICATION AREAS

- Security and alarm systems
- Voice over IP phones
- Access control systems
- IP Cameras
- Displays, Net Monitors
- Public address systems
- Wireless access points
- Environmental control
- Telemetry
- Remote environmental monitoring


# 1 Product Overview

## 1.1 IT5300 Product Selector

Part Number	Nominal Output Voltage	Maximum Output Power *
IT5305	5.0V	25 Watts Peak 18 Watts Continuous
IT5405	5.0V	27 Watts Peak 23 Watts Continuous
IT5312	12.0V	27 Watts Peak 24 Watts Continuous
IT5412	12.0V	27 Watts Peak 24 Watts Continuous
IT5512	12.0V	42 Watts Peak 36 Watts Continuous
IT5324	24.0V	26 Watts Peak 24 Watts Continuous

\*At 25°C with  $V_{IN} = 52V$

**Table 1: Ordering Information**

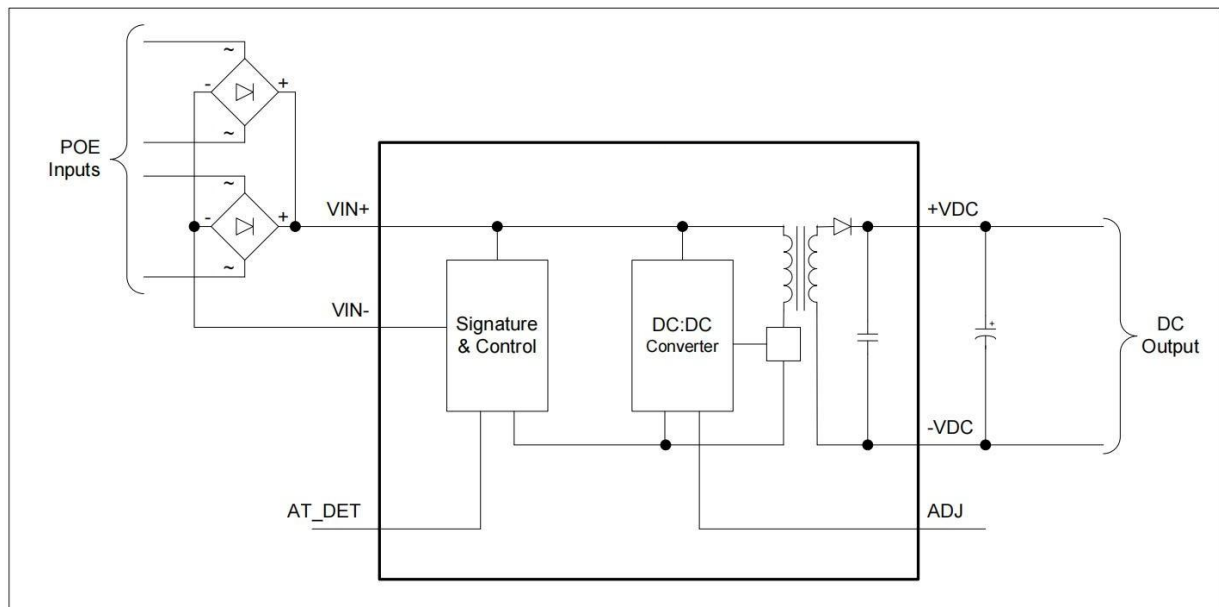


**Figure 1: Block Diagram**


## 1.2 Pin Description

1	VIN+	<b>POE Direct Input +.</b> This pin connects to the positive (+) output of the POE input bridge rectifiers.
2	VIN-	<b>POE Direct Input -.</b> This pin connects to the negative (-) output of the POE input bridge rectifiers.
3	TYP 2	<b>Class4 Detect Output.</b> This pin indicates if an Class4 PSE is supplying power to the IT5300/5400/5500;
4	TYP 3	<b>Class5/6 Detect Output.</b> This pin indicates if an class5/6 PSE is supplying power to the IT5500; <b>(Only IT5500)</b>
5	-VDC	<b>Negative DC Output.</b> This pin provides the negative regulated output from the Ag5300 and is internally connected to pin 8.
6	+VDC	<b>Positive DC Output.</b> This pin provides the positive regulated output from the IT5300.
7	ADJ	<b>Output Adjust.</b> The output voltage can be adjusted from its nominal value, by connecting an external resistor from this pin to either the +VDC pin or the -VDC pin.
8	-VDC	<b>Negative DC Output.</b> This pin provides the negative regulated output from the Ag5300 and is internally connected to pin 5.

## 2 Functional Description

### 2.1 Typical Connections

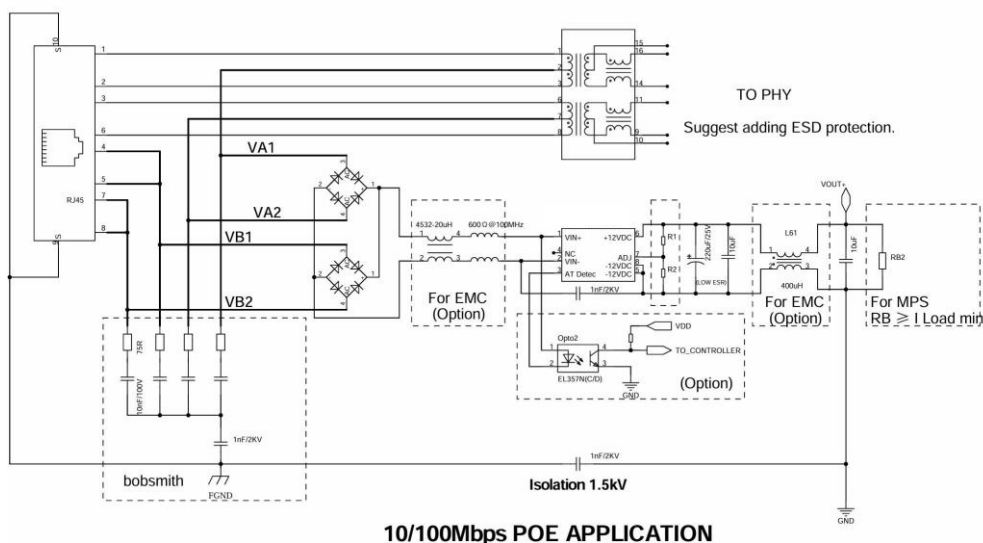

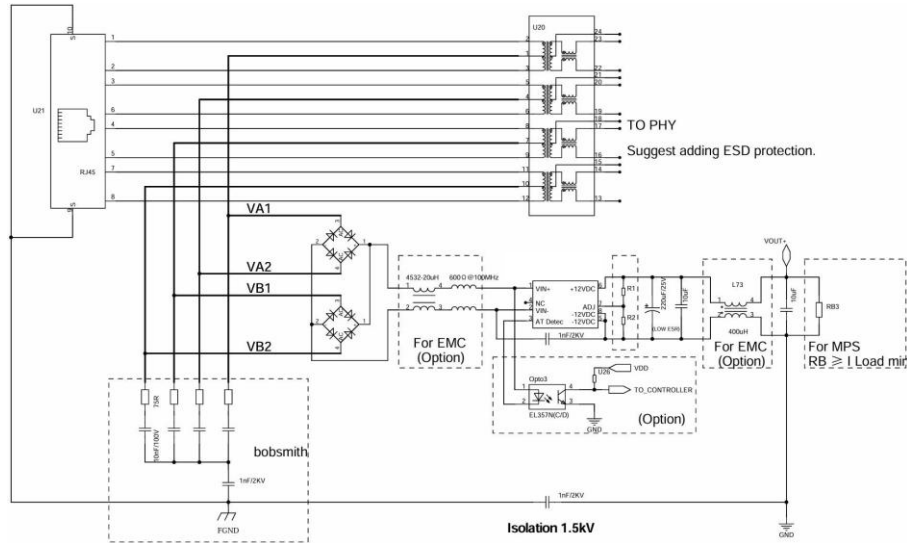

1G/2.5G/5G/10G POE APPLICATION


**Figure 2: Typical System Diagram**

\*Note: Suitable bridge rectifier for BR1 & BR2 would be a “MB210S” or equivalent.

## 2.2 Output Voltage Adjustment

The IT5300 series has an ADJ pin, which allows the output voltage to be increased or decreased.

Figure 3 shows how the ADJ pin is connected.

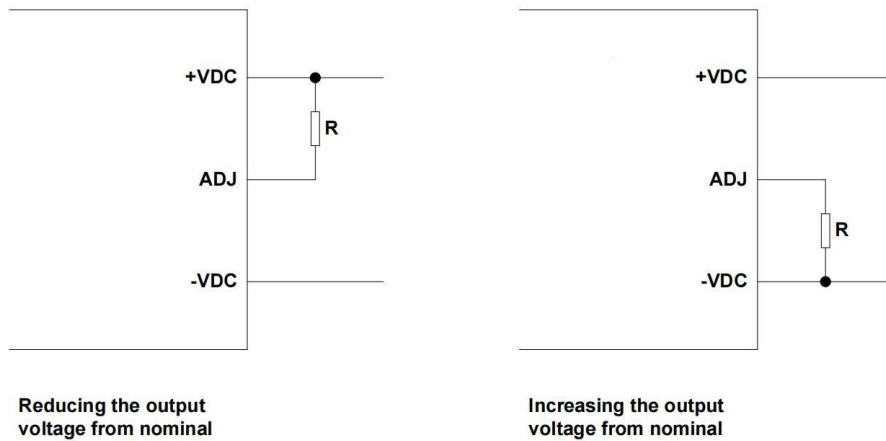

**Figure 3: Output Adjustment**

Reducing the output voltage, connect R between ADJ and +VDC			
Value of R	IT5305 output	IT5312 Output	IT5324 Output
Open Circuit	5.00V	12.07V	23.93V
0 Ohms	4.48V	10.0V	19.85V
100K	4.76V	11.15V	21.85V
470k	4.92V	11.76V	23.23V

Increasing the output voltage, connect R between ADJ and -VDC			
Value of R	IT5305 output	IT5312 output	IT5324 Output
Open Circuit	5.00V	12.07V	23.93V
0 Ohms	5.66V	12.75V	24.6V
100K	5.27V	12.34V	24.2V
470k	5.08V	12.16V	24.01V

**Table 3: Output Adjustment Resistor (R) Value**

### 3 Electrical Characteristics

#### 3.1 Absolute Maximum Ratings

	Parameter	Symbol	Min	Max	Units
1	DC Supply Voltage	V <sub>CC</sub>	-0.3	60	V
2	DC Supply Voltage Surge for 1ms	V <sub>SURGE</sub>	-0.6	80	V
3	Storage Temperature	T <sub>S</sub>	-40	+100	°C

#### 3.2 Recommended Operating Conditions

	Parameter	Min	Typ	Max	Units
1	Input Supply Voltage	36	52	57	V
2	Under Voltage Lockout	30		36	V
3	Operating Temperature	-40	25	85	°C
4	IEEE 802.3at	Class 4 (IT5300/5400)			
	IEEE 802.3bt	Class 8 (IT5500)			

#### 3.3 DC Electrical Characteristics

	DC Characteristic	Variant	Sym	Min	Typ <sup>1</sup>	Max	Units
1	Nominal Output Voltage	IT5X24	+VDC	23.5	23.9	24.3	V
		IT5X12		11.6	12	12.4	
		IT5X05		4.75	5	5.25	
2	Minimum Load <sup>2</sup>	IT5X24	I <sub>LOAD</sub>	20			mA
		IT5X12		40			
		IT5X05		100			

3	Output Current (VIN = 48V)	IT5324	I <sub>out</sub>		1		A
		IT5312			2		
		IT5412			2		
		IT5512			3		
		IT5305			3.6		
		IT5405			4.6		
<b>DC Characteristic</b>		<b>Variant</b>	<b>Sym</b>	<b>Min</b>	<b>Typ<sup>1</sup></b>	<b>Max</b>	<b>Units</b>
4	Line Regulation	IT5X24	V <sub>LINE</sub>		0.15		%
		IT5X12			0.05		
		IT5X05			0.05		
5	Load Regulation – Min to Max (VIN = 48V)	IT5X24	V <sub>LOAD</sub>		0.15		%
		IT5X12			0.1		
		IT5X05			0.1		
6	Output Ripple and Noise <sup>4</sup>	IT5324	V <sub>RN</sub>		140	@1A	mV <sub>P-P</sub>
		IT5312			135	@2A	
		IT5412			/	/	
		IT5512			/	/	
		IT5305			115	@4A	
		IT5405			140	@5A	
7	Peak Efficiency	IT5324	EFF		90.8	@1A	%
		IT5312			89.2	@2A	
		IT5412			/	/	
		IT5512			/	/	
		IT5305			86.5	@3.6A	
		IT5405			90	@4.6A	
8	Short-Circuit Duration <sup>3</sup>		T <sub>SC</sub>			∞	sec
9	Isolation Voltage (I/O) - Impulse Test		V <sub>ISO</sub>			1500	V <sub>PK</sub>


Note 1: Typical figures are at 25°C with a nominal 52V supply and are for design aid only. Not Guaranteed

Note 2: The module can emit an audible noise, if operated at less than the stated minimum I<sub>LOAD</sub> and cause the PSE to fail its MPS.

Note 3: >200mohm short due to thermal limitation.


Note 4: The output ripple and noise can be reduced with an external filter

**4 Package**

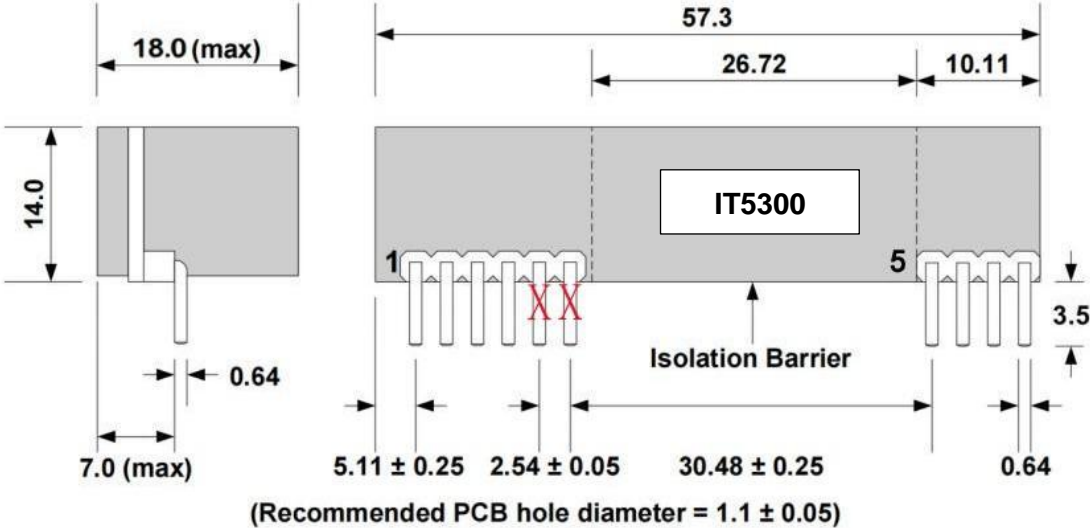


Dimensions (in mm) are nominal +/- 0.25 unless otherwise stated

### 1. Power Delivery in PoE Systems

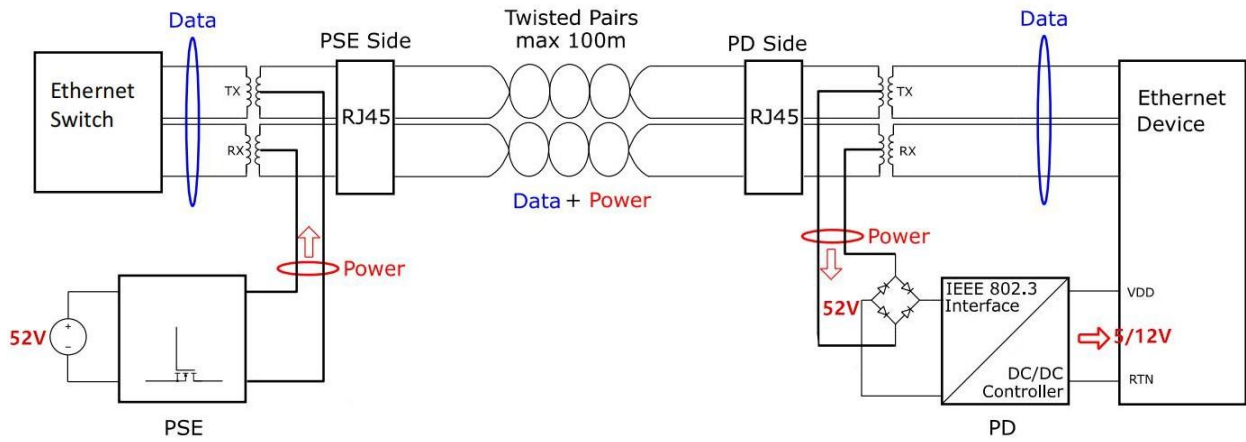


Power Class	Type 1 802.3af			Type 2 802.3at	Type 3 802.3bt		Type 4 802.3bt	
	Class 1	Class 2	Class 3	Class 4	Class 5	Class 6	Class 7	Class 8
Power from PSE	4 W	7 W	15.4 W	30 W	45 W	60 W	75 W	90 W
Power delivered to PD	3.84 W	6.49 W	13 W	25.5 W	40 W	51 W	62 W	71.3 W

### 2. Establishing PoE Connection – Type 1 (IEEE 802.3af/PoE)

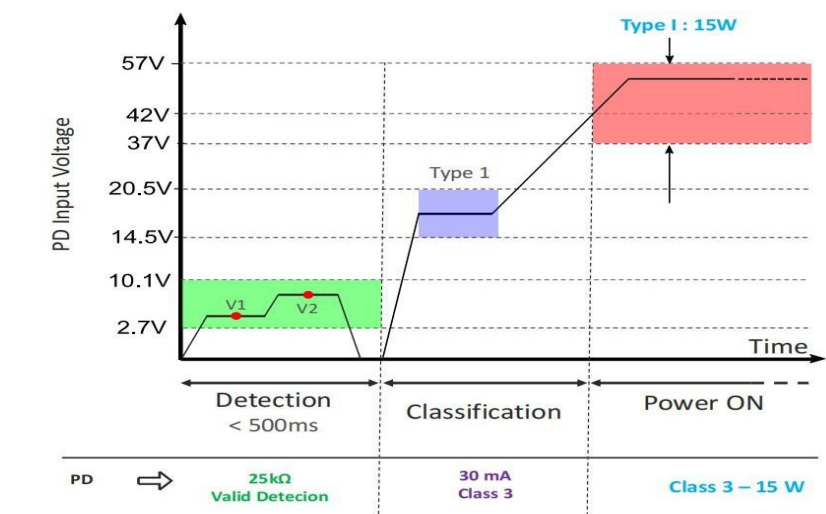

### 3. Establishing PoE Connection – Type 2 (IEEE 802.3at/PoE+)

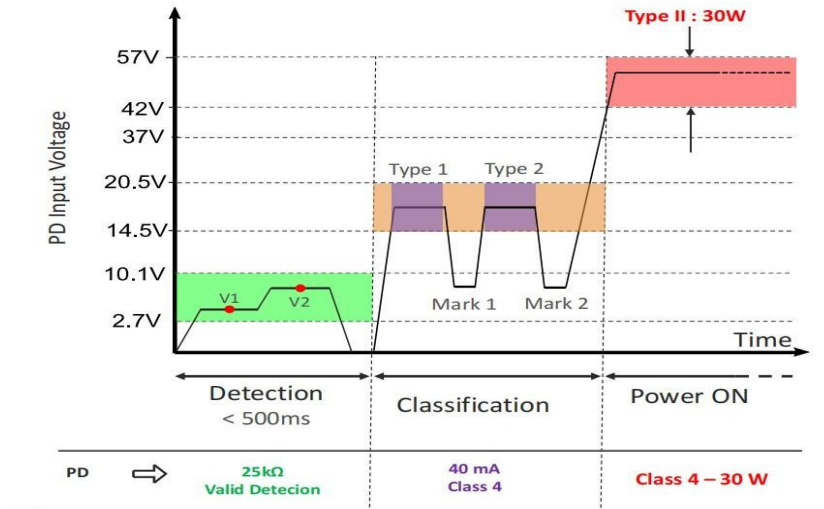

### 4. Establishing PoE Connection – Type 3 and 4 (IEEE 802.3bt)

